

RPLT-7200K LED LIGHTING TOWER



SPECIFICATIONS

ENGINE 1

Type	KUBOTA Z482 DIESEL
Engine Power (kW)	Vertical 2-cylinder in-line water cooled
RPM	4
Fuel Consumption (L/h)	2600
	0.88 - 0.98 (subject to environment)

ENGINE 2

Type	KUBOTA D905 DIESEL
Engine Power (kW)	Vertical 3-cylinder in-line liquid cooled
RPM	6
Fuel Consumption (L/h)	1500
	1.1

ALTERNATOR

Model	SD 16B/4-pole brushless
Rated Power	5.5kW

LIGHT FEATURES

Light (W)	LED 6 x 480
Luminous Flux (lm)	6 x 36000
Longevity (hrs)	20000

MAST FEATURES

Max. Erection Height (m)	11
Hydraulic Rotation	350 non-continuous
Operation Type	Hydraulic


DIMENSIONS AND WEIGHT

Dimensions (L x W x H) (mm)	3340 x 1900 x 2430
Weight (kg)	1950

STANDARD EQUIPMENT

- 48 Volt DC
- 6 x 480W LED lights 3 years warranty
- 270L plastic fuel tank – lower fuel consumption 0.88L/h (up to 38 day runtime, based on 8 hour shifts)
- SMS remote reporting – GPS option
- Control panel - state of the art
- Full hydraulic tower lift and rotation
- Heavy-duty trailer construction, dual-axle 4 x 16 inch tyres
- 4 hydraulic stabiliser legs
- Cable track for wiring protection
- IP65 rated for all lights and control box
- Battery isolator
- Emergency stop

REMOTE PROJECT SPECIALISTS
SAFER. GREENER. SMARTER SOLUTIONS.

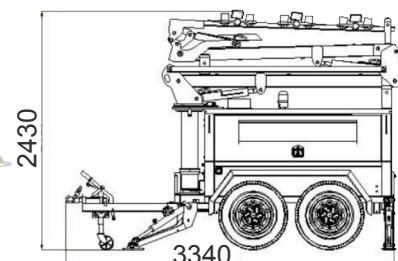

LIGHT LUX CHART

