

GA10YD/S SPECIFICATIONS

10kW



Australian Design. Powered by 

GENERAL

Model	GA10YD/S
Power Type	Diesel
Prime Power (kW/kVA)	10/10
Standby Power (kW/kVA)	11/11

ENGINE

Engine Make and Model	YANGDONG YD480D
Engine Type	Naturally aspirated, vertical in line, 4 stroke, 1500rpm
Engine Power (kW)	14
Fuel Tank Capacity (L)	90
Fuel Consumption (L/h)*	4.2 L/h
Battery Type	Lead-acid battery, available for 6 times. Starts under standard condition; connection cables.
Bore (mm) x Stroke (mm)	80 x 90
No. of Cylinders	4
Displacement (L)	1.809
Compression Ratio	18:1
Speed Control System	Mechanical governor
Lubricating Oil Capacity (L)	5.5

*Fuel Consumption is based on 100% load

ALTERNATOR


Model	SLG184E1, single bearing IP21
Frequency (Hz)	50
Rate Power (kW/kVA)	13/13
Power Efficiency	80.70%
Type	2 pole, rotating field
Exciter Type	Self-excited
Voltage Regulator	AS440
Voltage Regulation	±1.0%
No. of Phases	1 phase
Insulation	Class H/H
Protection	IP21
Rated Power Factor	1
Stator Winding	Double layer concentric
Winding Pitch	Two thirds
Waveform Distortion	No load <1.5%
Altitude (m)	1000

UNIT

Dimensions L x W x H (m)	1.8 x 0.9 x 1.4
Dry Weight (kg)	1050
Sound at 7m/dB	65

STANDARD FEATURES

- 50°C rated radiator
- Powder coated finish
- All moving parts fitted with safety guards
- IP65 electrical boxes dust and waterproof
- Rated lifting lugs
- Emergency E stop
- State of the art control system
- Remote monitoring

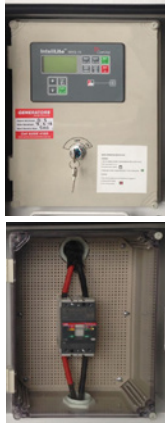

ASSEMBLY

The engine and alternator are closed coupled by means of an SAE flange. A full torsional analysis has been carried out to guarantee no harmful vibration will occur. Anti-vibration pads are affixed between engine alternator feet and base frame. Rubber diagonal isolators are specifically designed to reduce engine and alternator vibration and prevent distortion in the voltage and harmonic output of the generator. All iron and steel surfaces of the canopy fabrication have been sand blasted and then powder coated, which provides an excellent corrosion resistant surface.



CONTROL SYSTEM

InteliCompact^{NT} MINT controllers are integrated controllers for gen-sets operating in groups parallel to each other and with or without the mains. Functionality is optimised for ease of use, whilst the installation and configuration includes a built-in synchronizer and digital isochronous load sharer.

CompAp



QUALITY STANDARDS

Our generator sets are compliant with all the main standards, such as ISO8528, ISO14000, GB755, BS5000, VDE0530, ISO3046, IEC34-1, AS3000.

WARRANTY POLICY

12 months, 1200 hours as per generator. Generators Australia Pty Ltd Warranty Policy.