


Globe Power's GP280K Cube Lighting Tower features highly efficient LED lights and a safe 48V DC voltage for industry leading fuel savings. It is suitable for mining operations, construction projects, events, civil and road works, and is compliant with metropolitan and mining required specifications.



PRODUCT SPECIFICATIONS

GENERAL

Model	GP280K Cube V1.0
Lumen Output	277,000
Mast Height	8 metres (max)
Mast Type	Multi-section, telescoping
Lights	2 x 900W LED (Dimmable) Independently adjustable

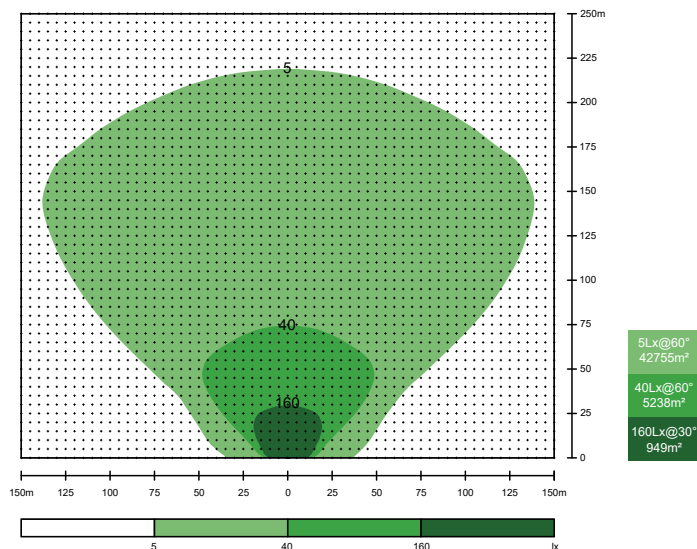

GENSET

Generator	Kubota D1105-E2BG
Genset Output	5kW DC 48V
Fuel Type	Diesel
Fuel Tank Capacity	230L, fully bunded
Fuel Consumption	0.8L/hr
Running Time	238 hours
Alternator	Meccalte PM5G-60/20
Noise Level	65dB at 7m
Control Panel	Smartgen lighting tower controller

UNIT INFORMATION

Dimensions (Stowed)	1250 x 1210 x 2500 (LxWxH)
Dimensions (Deployed)	2480 x 2440 x 7500 (LxWxH)
Weight	1,430
Lifting Points	1

OPERATIONAL

Wind Rating	120km/h
Mast Operation	Hydraulic lifting system
Mast Rotation	180° Manual rotation
Stabilisers	4 x Manually adjustable

FEATURES & OPTIONS

- Dusk sensor
- Jump start receptacle
- Level Sensor with alarm and lockout
- Isolators
- Quick mount trailer optional
- Fire extinguisher
- Trammig alarm
- Jack pads
- Door safety switches