

DIESEL LIGHTING TOWER
GP160K MINI



Globe Power’s GP160k Mini LED Mobile Lighting Tower, equipped with a 2.5kW generator, delivers 160,000 lumens of light. This unit features a compact system, ensuring ease of operation and reliability in any environment

DURABLE & COST
EFFECTIVE

BUILT FOR INDUSTRY

AUSTRALIAN DESIGNED



PRODUCT SPECIFICATIONS

GENERAL

Model	GP160k Mini
Light Power	4 x 300w LED (Dimmable)
Light Output	160,000 Lumens
Mast Height	7.1m
Mast Rotation	355° Electric Rotation
Light Bar Tilt	0° - 90° Electric Tilt
Features	Dusk Sensor, Fire Extinguisher, Level Sensor, Door Safety Switches, Isolators, Jump Start Receptacle, Remote Monitoring, 7 Day Timer

GENSET


Engine	Kubota Z482 - Stage V
Fuel Type	Diesel
Fuel Tank Capacity	120L, fully bunded
Fuel Consumption	0.61L/hr
Running Time	191 hours
Alternator	Meccalte 48v - 2.5kw
Noise Level	60db at 7m
Control Panel	Smartgen lighting tower controller

OPERATIONAL

Wind Rating	100km/h
Mast Operation	Hydraulic lifting system
Stabiliser Support	4 x Manually adjustable

UNIT INFORMATION

Dimensions (Stowed)	1865 x 1420 x 2325 (LxWxH)
Dimensions (Deployed)	2260 x 1690 x 7110 (LxWxH)
Weight	1225kg
Trailer Type	Single Axle, mechanical brake
Lifting Points	1

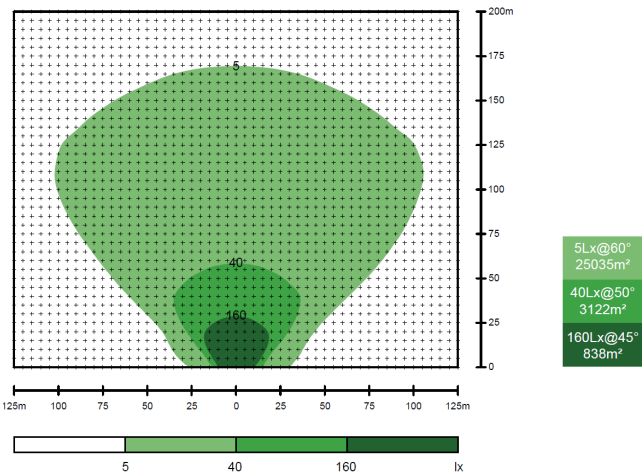

GP160k-Mini-V3-0525