


# SOLAR LIGHTING TOWER GP86K DAYMAKER



Globe Power's Daymaker GP86K Solar Lighting Tower has been built to suit various industries and is compliant with metropolitan and mining specifications.

- 7 day timer
- Day/night modes
- Jack pads
- Fire extinguisher
- Emergency stop
- Isolators
- AC charger
- Tilt sensor
- Wheel chocks
- Fork pockets
- Lifting points

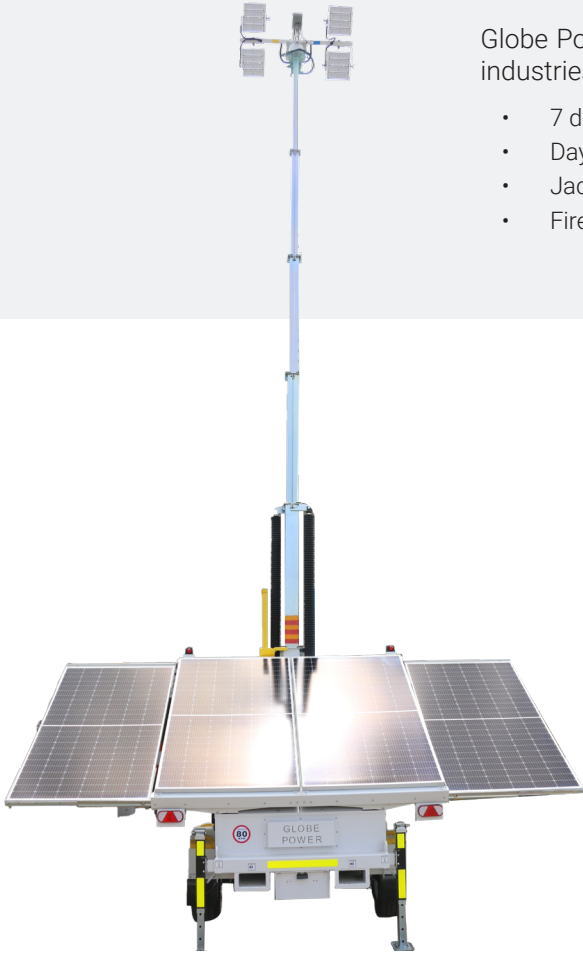

USER-FRIENDLY OPERATION INTERFACE

SOLAR & LITHIUM IRON PHOSPHATE BATTERY

PORTABLE & EASY TO TRANSPORT

AUSTRALIAN DESIGNED & ENGINEERED

## PRODUCT SPECIFICATIONS

### GENERAL

Model	GP86K Daymaker
Lumen Output	91,000
Mast Height	9 metres
Mast Type	Hydraulic/Cable
Lights	4 x 200w LED Modules (Dimmable)
Coverage	13,788m <sup>2</sup> at 5 lux

### OPERATIONAL DATA


Wind Rating	100km/h
Working Temperature	0 to 50°C
Light Bar Tilt	0 to 90° Electric
Light Bar Rotation	355° Electric
Stabiliser Supports	4 x Manual

### BATTERY

Battery	15.4kWh Lithium LiFePO4
Run Time	34 hours
Solar	1.8kWp
Solar Tilt	30°
Solar Efficiency	1 hr of sun/3 hrs of light

### UNIT INFORMATION

Dimensions (Transport)	3660 x 2240 x 2930 (LxWxH)
Dimensions (Deployed)	3600 x 4370 x 9700 (LxWxH)
Weight	1,700kg
Security	Wheel/hitch locks, wheel clamp, security wheel nuts

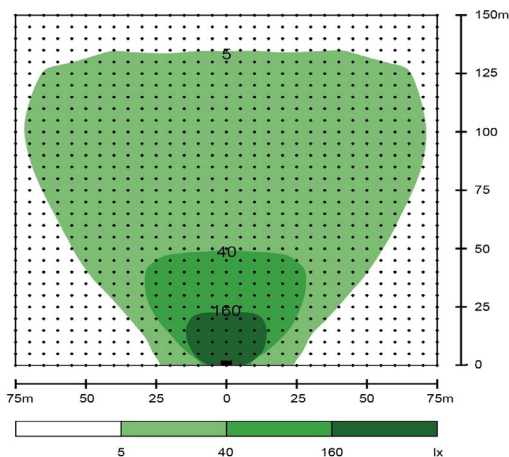

5Lx@60°	13788m <sup>2</sup>
40Lx@50°	2242m <sup>2</sup>
160Lx@35°	970m <sup>2</sup>

GP86K-Daymaker-V4-0226